

TECHNICAL  
SPECIFICATIONS

Product Code	PMM2/M3-HI22-SCH
Dimension (mm) W x L x H	50x50x7
Material	PMMA
Fastening	Screw
Beam Angle	146° - 54° Medium, Type II
Type	4 in 1
Optical Efficiency	%93
Rohs Complaint	Yes


MATERIALS

PMMA clear, Non-yellowing for 10 years.  
Yellowness Index (YI) according to the test standarts for Arizona/Florida outdoor exposure testing:  
-YI 6 under hot/dry conditions  
-YI 8 under hot/wet conditions


INSTRUCTIONS FOR USE &  
MAINTENANCE

Working Temperature : -40° C ~ +100° C  
Storage Temperature : -40° C ~ +100° C  
Please handle or install lenses with wearing gloves.  
Skin oils may damage lens or its optical characteristic.  
Never use any commercial cleaning solvents on lenses , like alcohol.  
If necessary, clean lenses wiht mild soap, water and soft cloth.


**SAMSUNG LH351B**

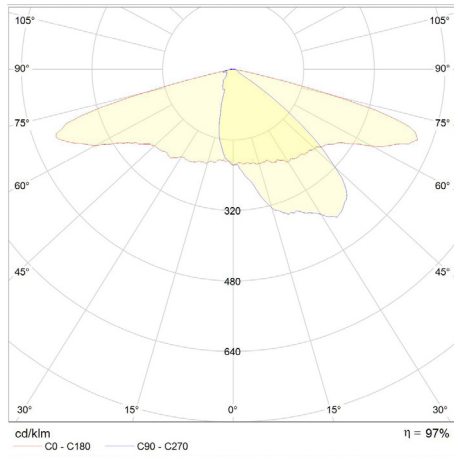


**CREE XPG3**

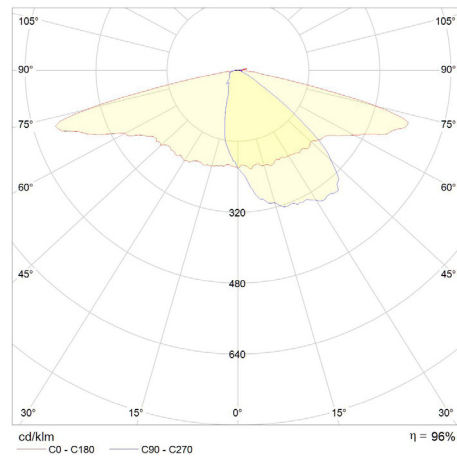


**NICHIA NVSW219D**

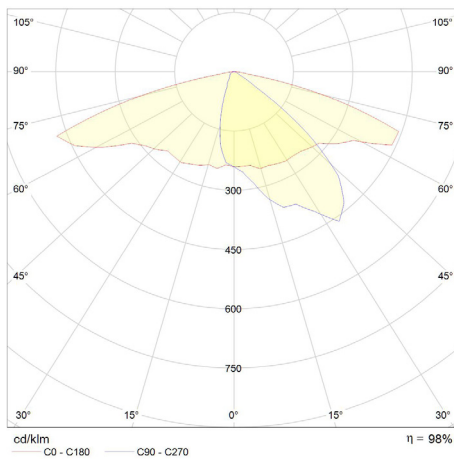


**OSRAM OSLON SQUARE**

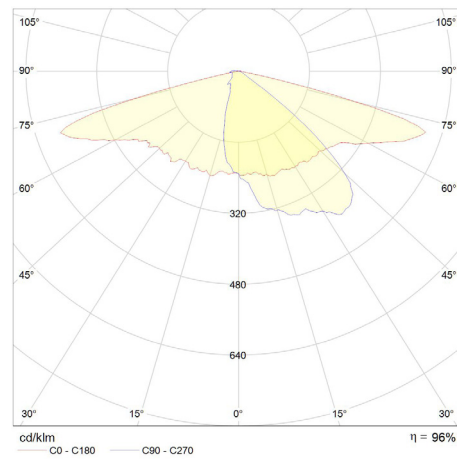



**CREE XTE**

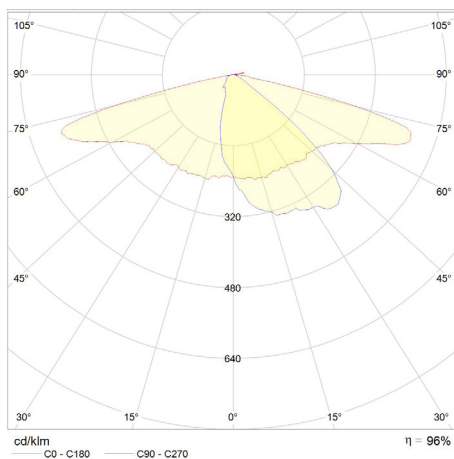

**NICHIA NF2W 757 GR**

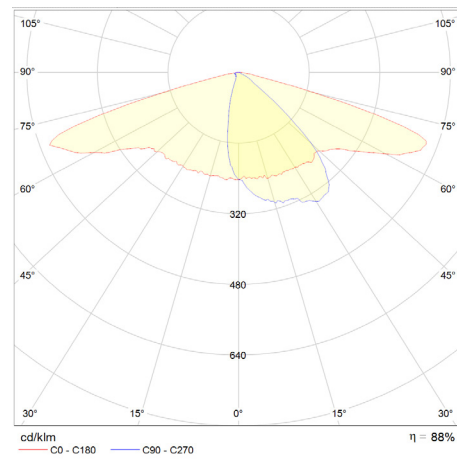

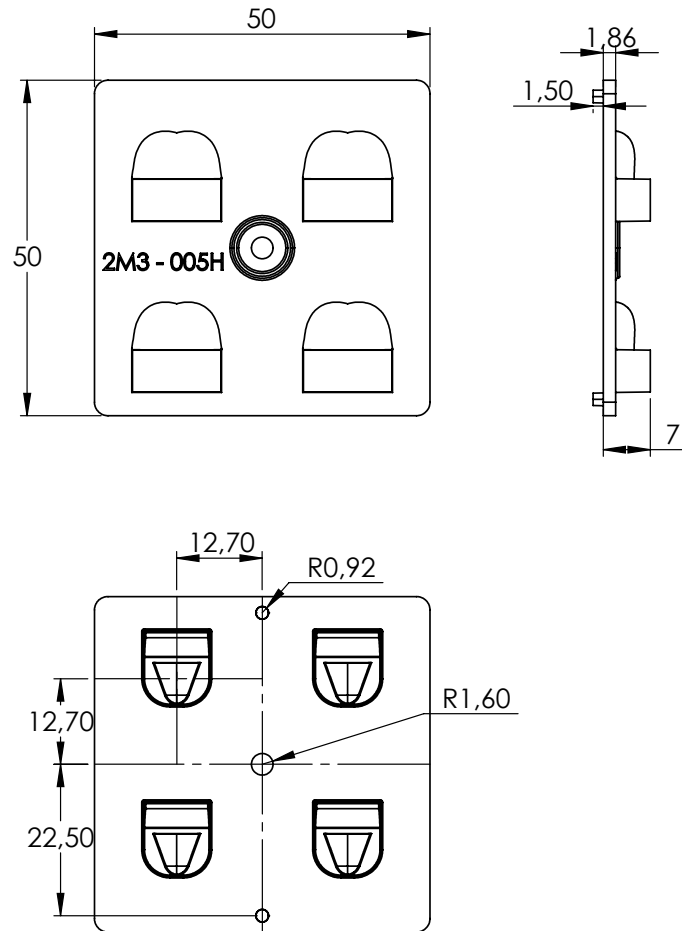

<b>EMAGE<sup>®</sup></b>	UNIT mm	PART NO: PMM2/M3-HI22-SCH	 GENERAL TOLERANCES $\pm 0,5$ MM		
	MATERIAL	PMMA	REV.	REVISION	REV. DATE
	WEIGHT	7,39 g	1		
	DATE	22.06.2020	2		
		PAGE 1 / 1	3	FORM A4	SCALE 1:1

Box Size (mm) W x L x H	370x300x225
Box Weight	6,2 Kg
Box Quantity	660 pcs

