

CONNECTORS MANUFACTURER




Pin Header 1.27mm SQ Pin=0.4mm 1 Row H=1.0/1.5/2.0/2.5mm SMT / Stack SMT Type

Specifications


Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C

Material


Insulator:Hi-Temp. Thermoplastic, UL 94V-0
 Terminal:Copper Alloy
 Standard Plating:Gold Flash ©:Standard Dimensions

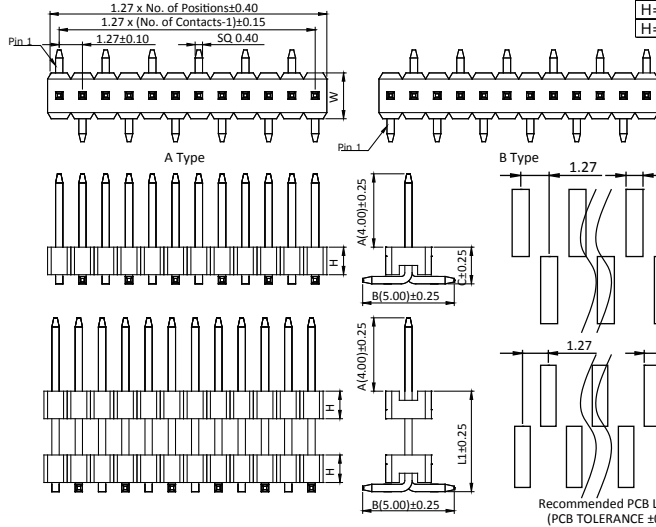

	Dimensions			
	W	A	B	C
H=1.00mm	2.10	3.00	5.00	1.50
H=1.50mm				2.00
H=2.00mm	2.50	4.00		2.50
H=2.50mm				3.00



P/N.:5PH3MSA 10/15/20/25-1XXU




P/N.:5PH3DMA 10/15/20/25-1XXU

Pin Header 1.27mm




ROHS


Pin Header 1.27mm SQ Pin=0.4mm 2 Row H=0.85/1.0/1.5/1.7/2.0/2.5mm SMT / Stack SMT Type

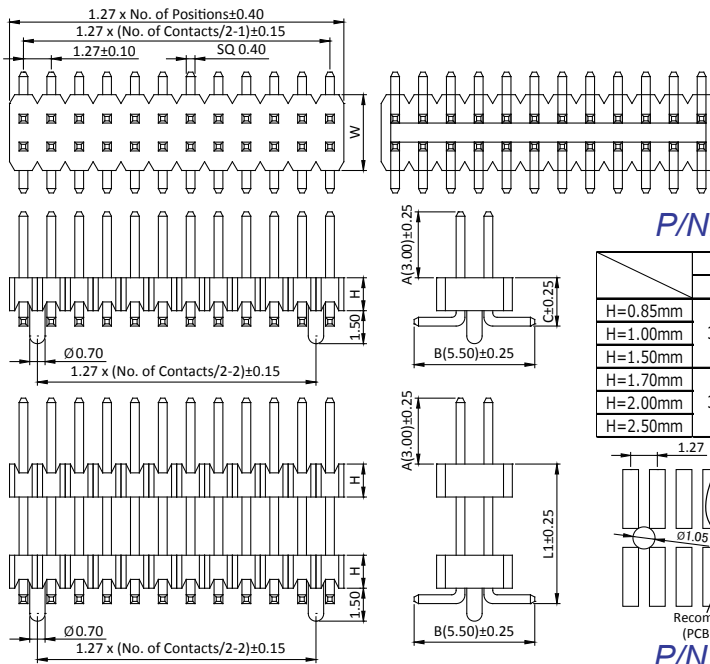

	Dimensions			
	W	A	B	C
H=0.85mm	3.40	3.00	5.50	1.30
H=1.00mm				1.50
H=1.50mm	3.00	4.00		2.00
H=1.70mm				2.20
H=2.00mm	3.00			2.50
H=2.50mm				3.00



P/N.:5PH3MSA 08/10/15/17/20/25-2XXU



P/N.:5PH3DMA 08/10/15/17/20/25-2XXU

ORDER INFORMATION

5 P H 3 X X A X X - X X X X X X N X U - A/L1/B A/B/C

- MS : Single Plastic SMT
DM : Dual Plastic SMT
- No. of Contact Per Row (02~50)
- 1: Single Row
2: Dual Row
- Plastic Height
08:H=0.8mm
10:H=1.0mm
15:H=1.5mm
17:H=1.7mm
20:H=2.0mm
25:H=2.5mm
- ©G0:Gold Flash S0:Selective
GA:Gold 5u" SA:Selective 5u"
GB:Gold 10u" SB:Selective 10u"
GC:Gold 20u" SC:Selective 20u"
GD:Gold 30u" SD:Selective 30u"
T0: Tin Plated
TE: Tin 200u"
- N:W/O Peg
P:With Peg (For Dual Row Only)
- U:RoHS Hi-Temp.
- ©T:Tube, W/O Cap
C:Tube, With Cap
H :Tape & Reel, W/O Cap
R:Tape & Reel,With Cap
- A:A Type
B:B Type
(For Single Row Only)
N:Non Type
(For Dual Row Only)
- EX.:060033050
A:6.00(060)
B/L1:3.30(033)
C/B:5.00(050)
A/B/C For 5PH5MSAXX-1/2
A/L1/B For 5PH5DMAXX-1/2

©:Standard Recommend
 Tube package is not available for under 1*5 & 2*5 pin counts

Old P/N:PH3M/DM08/10/15/17/20/25-1/2