





SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

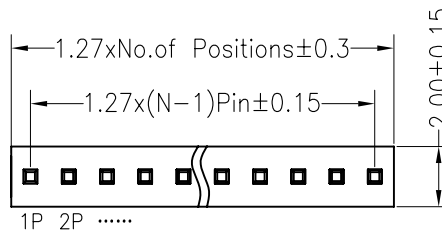

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

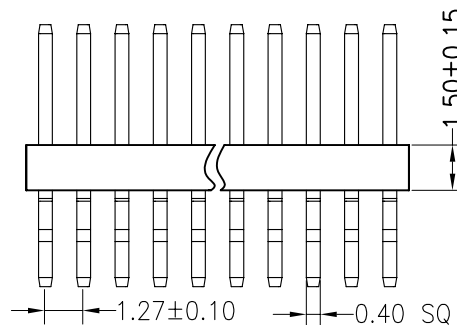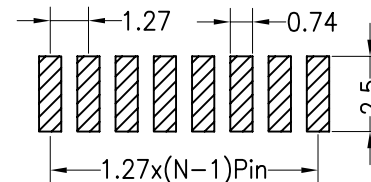

Dimension antitheses list		
ITEM	PA	L
Standard	4.00	8.80
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	WZG	14.08.16	SCALE	FIT
				DIM	TOL				UNIT	mm
A0	2012.08.19	NEW DRAWING		X.X	±0.30	CHECK			SIZE	A4
				X.XX	±0.20				SHEET	1/1
				X.XXX	±0.10	APPROVE			PROJ.	◆
				Angle	±3°					

KLS ELECTRONIC CO., LTD

PART NO. L-KLS1-207CA-1.5-1-10-RT-R
 TITLE: 1.27PH 1xnPin H1.5 卧贴