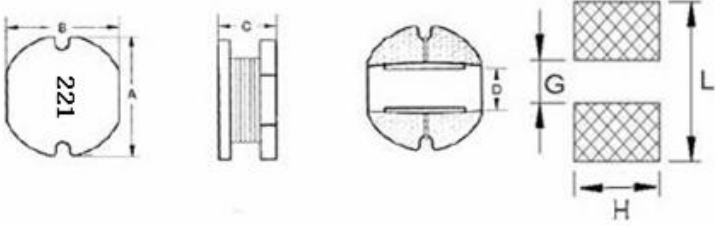
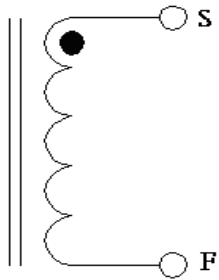


SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:		
PART NO: FPI0502-221M		DWG.NO: MY0215123		
CUSTOMER PART NO:		CUST.DWG.NO:		
(1) DIMENSION(UNIT: mm) 		A	5.8 ± 0.3	m/m
		B	5.2 ± 0.3	m/m
		C	2.5 ± 0.3	m/m
		D	1.3 (REF)	m/m
		G	1.7 (REF)	m/m
		H	5.5 (REF)	m/m
		L	6.5 (REF)	m/m
(2)ELECTRICAL REQUIREMENTS		(3)SCHEMATIC		
L (uH)	220 ± 20%			
RDC (Ω)	3.5 (MAX)			
IDC (A)	0.6 (MAX)			
TEST CONDITION	1KHZ/1V			
(4)MATERIAL LIST				
NO/ITEM	MATERIAL	SUPPLIER		
CORE	R5A DR5.8×2.5 B2.5 F1.0 或同等級	昱欣		
WIRE TYPE	2UEW φ 0.08m/m 或同等級	上海中馬		
WINDING	70.5 TS (REF)			
		APPROVED BY		
		吳載敏		
		CHECKED BY		
		張明德		
		DRAWN BY		
		Vicky		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:			
PART NO: FPI0502-221M				DWG.NO: MY0215123			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 1KHZ/1V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C	
SPEC	220 ± 20%	3.5 (MAX)	0.6 (MAX)	5.8 ± 0.3	5.2 ± 0.3	2.5 ± 0.3	
1	219	2.9	OK	5.58	5.20	2.55	
2	217	3.0	OK	5.61	5.21	2.54	
3	215	3.0	OK	5.60	5.21	2.58	
4	223	2.9	OK	5.61	5.20	2.57	
5	221	3.0	OK	5.60	5.21	2.54	
6	218	2.9	OK	5.58	5.21	2.51	
7	220	2.9	OK	5.59	5.20	2.58	
8	219	3.0	OK	5.60	5.19	2.51	
9	216	3.0	OK	5.60	5.21	2.59	
10	221	2.9	OK	5.59	5.20	2.57	
\bar{X}	219	3.0		5.60	5.20	2.55	
R	8	0.1		0.03	0.02	0.08	
TEST INSTRUMENTS HIOKI3532-50 LCR METER VR-131 RDC METER VR116+VR7220 BA/S CURRENT				APPROVED BY			
				吳載敏			
				CHECKED BY			
				張明德			
				DRAWN BY			
				Vicky			


CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

INDUCTANCE VS CURRENT

CUSTOMER:	DATE:
PART NO: FPI0502-221M	DWG.NO: MY0215123
CUSTOMER PART NO :	CUST.DWG.NO :

CURRENT VS INDUCTANCE					
IDC(A)	INDUCTION(μ H)				
0	220				
0.30	216				
0.50	210				
0.54	203				
0.60	186				
0.64	161				

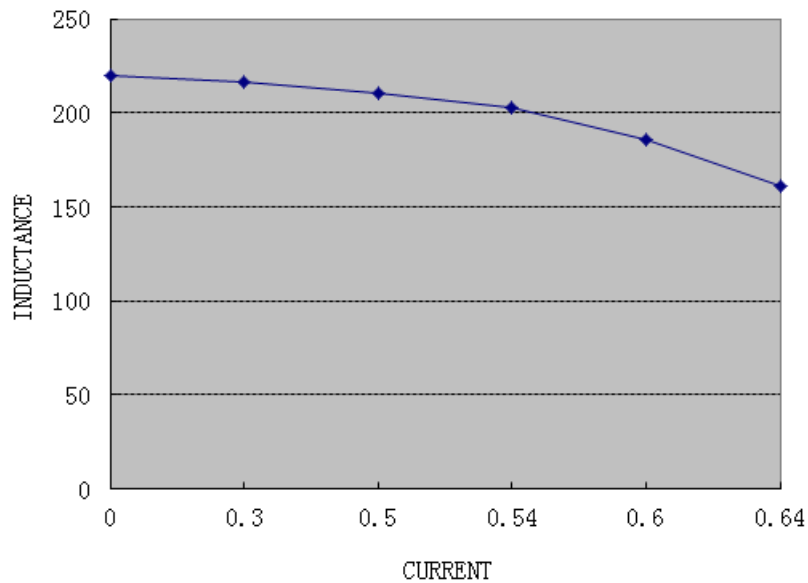

APPROVED BY 吳載敏	CHECKED BY 張明德	DRAWN BY Vicky
--------------------	-------------------	-------------------