




Specifications:

Contact Resistance: 30mΩ max. DC 100mA
Insulator Resistance: 1000MΩ min. at DC 500V
Current Rating: 1AMP

Dielectric withstanding

Voltage: AC 500V For 1 minute
Operating Temperature: -55 °C ~ +105 °C
Contact: phosphor bronze
Housing: PBT & 20% Glass Fiber

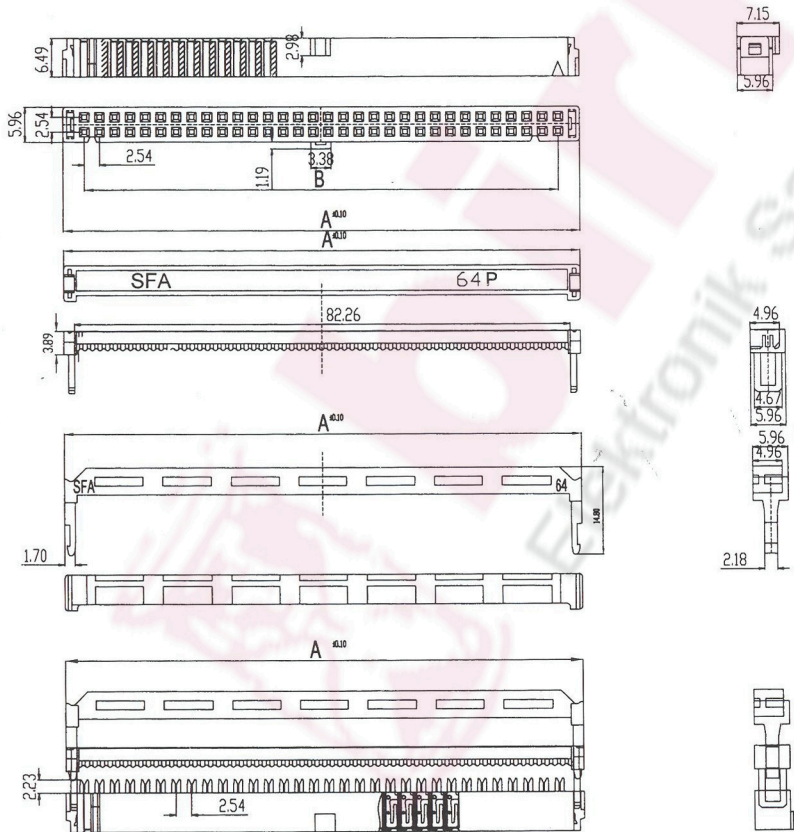

Dimension

Position	A	B
6	14.64	5.08
8	15.91	7.62
10	17.18	10.16
14	22.26	15.24
16	24.80	17.78
18	24.80	20.32
20	29.88	22.86
26	37.50	30.48
30	42.58	35.56
34	47.66	40.64
40	55.28	48.26
50	67.98	60.96
60	80.68	73.66
64	85.76	78.74