


GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		SIM CARD CONN; PUSH PUSH R/A, 6P & 8P, SMD with CD Pin
X. ±0.15	X. ±5°	UNITS	mm	
.X ±0.03	.X ±3°	SHEET SIZE	A4	
.XX ±0.05	.XX ±2°		KLS P/N:	L-KLS1-SIM-014-6P-R
Draw by: Jenny	Date:	2018-03-10		NingBo KLS ELECTRONIC CO., L TD.
Check by:	Date:	2018-03-10		
SCALE	SHEET	1 OF 1		

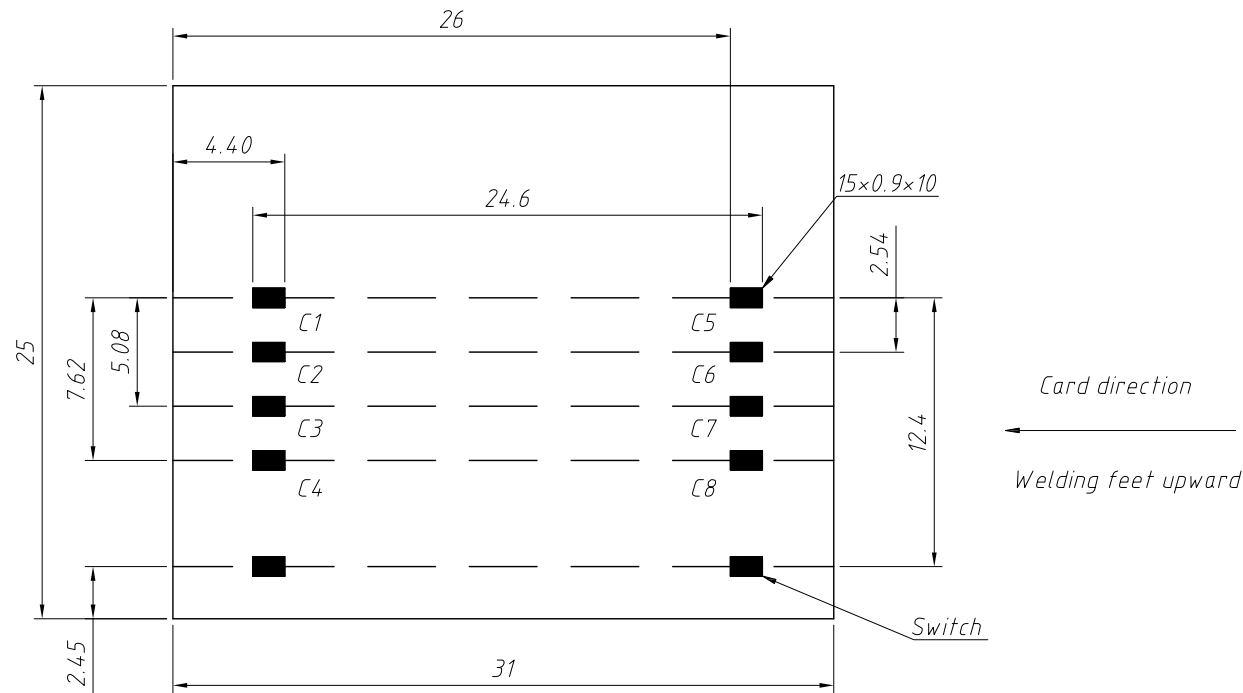

Material:
 Housing Material: LCP UL94V-0
 Contact Material: Tin-Bronze
 Package: Tape and Reel Package

Electrical Characteristics:
 Voltage rating: 5V (AC/DC) Max
 Current Rating: 10mA (AC/DC) Max
 Withstand voltage: 500V AC/1Minute
 Insulation resistance: $\geq 1000M\Omega$ Min At 500V AC
 Contact resistance: $\leq 30M\Omega$
 Life: >10000 Cycles
 Operating Temperature: $-45^{\circ}C \sim +105^{\circ}C$

RECOMMENDED PCB LAYOUT

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		SIM CARD CONN; PUSH PUSH R/A, 6P & 8P, SMD with CD Pin L-KLS1-SIM-014-6P-R
X. ± 0.15	X. $\pm 5^{\circ}$	UNITS	mm	
.X ± 0.03	.X $\pm 3^{\circ}$	SHEET SIZE	A4	
.XX ± 0.05	.XX $\pm 2^{\circ}$		KLS P/N:	
Draw by: Jenny	Date: 2018-03-10	NingBo KLS ELECTRONIC CO.,LTD.		
Check by:	Date: 2018-03-10			
SCALE	SHEET 1 OF 1			