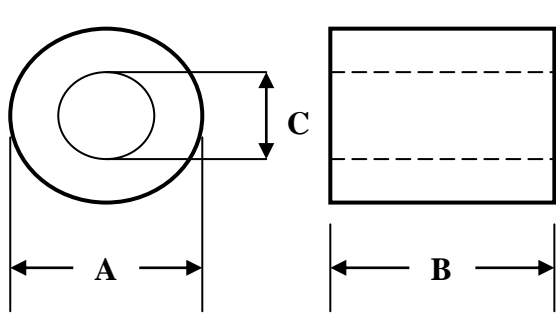


# SPECIFICATION FOR APPROVAL

CUSTOMER :				DATE :	
PART NO : RH-26×28.5×13 (B8)				DWG.NO : SY5317905S6B	
CUSTOMER PART NO :				CUST.DWG.NO :	
(1)DIMENSION(UNIT:mm)  				A	26.0 ± 0.6 m/m
				B	28.5 ± 0.7 m/m
				C	13.0 ± 0.5 m/m
				D	
				E	
				F	
				G	
				H	
				I	
				J	
				(2)ELECTRICAL REQUIREMENTS	
Z	MIN 80 OHM	TEST FREQ	25 MHz		
Z	MIN 175 OHM	TEST FREQ	100 MHz		
Z	MIN OHM	TEST FREQ	MHz		
Z	MIN OHM	TEST FREQ	MHz		
(3)TEST INSTRUMENTS					
HP4286A					
MATERIAL (ui)	800 ± 25%			APPROVED BY 吳載敏	
CORE	RH-26×28.5×13				
WIRE	2UEW φ 0.6 × 120mm			CHECKED BY 張明德	
WINDING	1 Ts			DRAWN BY Vicky	

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# TEST DATA

CUSTOMER :					DATE :				
PART NO : RH-26×28.5×13 (B8)					DWG.NO : SY5317905S6B				
CUSTOMER PART NO :					CUST.DWG.NO :				
IMPEDANCE					DIMENSION (UNIT : mm)				
FREQ	25 MHz	100 MHz			A	B	C		
SPEC	MIN 80 OHM	MIN 175 OHM			26.0 ± 0.6	28.5 ± 0.7	13.0 ± 0.5		
1	108.0	228.4			26.18	28.57	13.00		
2	110.1	228.1			26.12	28.22	12.87		
3	108.7	226.1			26.02	28.41	12.90		
4	108.0	228.2			26.11	28.66	12.97		
5	106.5	224.5			25.94	28.20	13.06		
6	108.0	228.4			26.18	28.57	13.00		
7	110.1	228.1			26.12	28.22	12.87		
8	108.7	226.1			26.02	28.41	12.90		
9	108.0	228.2			26.11	28.66	12.97		
10	106.5	224.5			25.94	28.20	13.06		
$\bar{X}$	108.3	227.1			26.07	28.41	12.96		
R	3.6	3.9			0.24	0.46	0.19		
REMARK: 產品不能有明顯缺陷、污損，產品缺口長、寬在 2.2 mm 以下， 深度在 1.2mm 以下。						APPROVED BY			
						吳載敏			
						CHECKED BY			
						張明德			
						DRAWN BY			
						Vicky			

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# RH-26×28.5×13 (B8)

