

Hantek 5 in 1 Arbitrary Waveform Generator + Pulse Generator + Function Generator + Harmonic Generator + Frequency Meter

HDG3000B sets arbitrary waveform generator, pulse generator, function generator, harmonic generator, frequency meter 5 functions in one. It uses the DDS (Direct Digital Synthesizer) technology, and can generate stable, pure, and low-distortion output signal. Humanized interface design and keyboard layout give users extraordinary experience. Rich configuration interfaces can easily achieve computer control of the instrument, which provides users with more solutions for measurement.

Features

- Frequency range: 1 μ Hz ~ 100MHz/80MHz/60MHz/40MHz/25MHz/15MHz.
- Up to 300MSa/s sampling rate, no distortion of analog waveforms.
- 16-bit vertical resolution ensures the accuracy of waveform amplitude.
- Equip with dual channels with equal performance, equivalent to two independent signal sources.
- The storage depth of up to 2M ensures the creation of more waveform cycles and better waveform details.
- A 4.3-inch color TFT LCD screen, a clear and intuitive user interface.
- Rich modulation function, support for AM, DSB - AM, FM, PM, ASK, FSK and PSK, BPSK, QPSK, 3 FSK, 4 FSK, OSK and PWM, etc.
- 1 μ Hz frequency resolution: When the impedance is high, the amplitude range is 2mV~20Vpp. When the impedance is 50 Ω , the amplitude range is 2mV~20Vpp.
- Built-in 80MHz high-resolution frequency meter.
- Standard communication interface: front USB 2.0 high speed (USB Host) and rear USB 2.0 full speed (USB Device).
- More than 160 kinds of arbitrary signals, such as exponential rise, exponential decline, ECG signal, Gaussian, semi-positive vector, Lorentz, duobinary, etc.
- Built-in 16 harmonic generator function, output with specified frequency, amplitude and phase of harmonics, usually used in harmonic detector or equipment test.

Model	Channels	Max Output Frequency	Max Sampling Rate	Vertical Resolution	Waveform Length	Interface
HDG3012B	2CH	15MHz	300MSa/s	16Bits	2Mpts	USB Host , USB Device
HDG3022B	2CH	25MHz	300MSa/s	16Bits	2Mpts	USB Host , USB Device
HDG3042B	2CH	40MHz	300MSa/s	16Bits	2Mpts	USB Host , USB Device
HDG3062B	2CH	60MHz	300MSa/s	16Bits	2Mpts	USB Host , USB Device
HDG3082B	2CH	80MHz	300MSa/s	16Bits	2Mpts	USB Host , USB Device
HDG3102B	2CH	100MHz	300MSa/s	16Bits	2Mpts	USB Host , USB Device

Model	HDG3102B	HDG3082B	HDG3062B	HDG3042B	HDG3022B	HDG3012B
Channel	2					
Wavelength	2M					
Frequency range	100MHz	80MHz	60MHz	40MHz	25MHz	15MHz
Sampling rate	300MSa/s					
Voltage resolution	16Bits					
Waveform						
Standard waveform output	sine wave, square wave, triangular wave, pulse wave, noise, harmonics					
Arbitrary waveform output	160 kinds of arbitrary waveforms, including exponential rise, exponential fall, ECG signal, Gauss, half vector, Lorentz, dual tone multi-frequency, DC voltage, etc					
Frequency property						
Sine wave	1 μ Hz ~ 100 MHz	1 μ Hz ~ 80 MHz	1 μ Hz ~ 60 MHz	1 μ Hz ~ 40 MHz	1 μ Hz ~ 25 MHz	1 μ Hz ~ 15 MHz
Square wave	1 μ Hz ~ 15 MHz	1 μ Hz ~ 15 MHz	1 μ Hz ~ 15 MHz	1 μ Hz ~ 15 MHz	1 μ Hz ~ 15 MHz	1 μ Hz ~ 15 MHz
Pulse wave	1 μ Hz ~ 15 MHz	1 μ Hz ~ 15 MHz	1 μ Hz ~ 15 MHz	1 μ Hz ~ 15 MHz	1 μ Hz ~ 15 MHz	1 μ Hz ~ 15 MHz
Triangle wave	1 μ Hz ~ 2 MHz	1 μ Hz ~ 2 MHz	1 μ Hz ~ 2 MHz	1 μ Hz ~ 2 MHz	1 μ Hz ~ 2 MHz	1 μ Hz ~ 2 MHz
Harmonic	1 μ Hz ~ 50 MHz	1 μ Hz ~ 40 MHz	1 μ Hz ~ 30 MHz	1 μ Hz ~ 20 MHz	1 μ Hz ~ 10 MHz	1 μ Hz ~ 5 MHz
Noise (3 db)	100 MHz bandwidth					
Arbitrary wave	1 μ Hz ~ 20 MHz	1 μ Hz ~ 20 MHz	1 μ Hz ~ 20 MHz	1 μ Hz ~ 15 MHz	1 μ Hz ~ 15 MHz	1 μ Hz ~ 15 MHz
Resolution	1 μ Hz					
Precision	\pm 1ppm, 18~28 $^{\circ}$ C					
Square wave property						
Rise/Fall time	Typical (1kHz, 1Vpp) \leq 9ns					
Overshoot	Typical (100kHz, 1Vpp) \leq 5%					
Duty cycle	0.001% ~ 99.999% The range varies with the frequency					
Asymmetry	1% of the period plus 4ns					

Triangular wave property						
Linear	≤ 1% of peak output (typical, 1kHz, 1Vpp, symmetry 100%)					
Symmetry	0% ~ 100%					
Impulse wave property						
Cycle	67ns~1Ms	67ns~1Ms	67ns~1Ms	67ns~1Ms	67ns~1Ms	67ns~1Ms
Pulse	≥16ns	≥16ns	≥16ns	≥16ns	≥16ns	≥16ns
Rise/Fall time	≥9ns (limited by current frequency setting and pulse width setting)					
Overshoot	Typical (1kHz, 1Vpp)					
	≤5%					
Arbitrary wave property						
Wavelength	2M					
Vertical resolution	16 Bits					
Sampling rate	1μSa/s~62.5MSa/s, 1μSa/s resolution					
Time of rise/fall	Ns of 9 or higher					
Overshoot	Typical (1Vpp)					
	≤5%					
Harmonic property						
Harmonic frequency	≤16					
Harmonic type	Even harmonics, odd harmonics, all harmonics					
Harmonic amplitude	All harmonic amplitude can be set.					
Harmonic phase	All harmonic amplitude can be set.					
Amplitude property (50Ω terminal)						
Amplitude range	≤10MHz: 1mVpp ~ 10Vpp;					
	≤55MHz: 1mVpp ~ 5.5Vpp;					
	≤80MHz: 1mVpp ~ 3.5Vpp;					
	≤100MHz: 1mVpp ~ 2Vpp;					
Precision	Typical (1kHz sine wave, 0V offset, > 10mVPP)					
	± 1% setting value ± 5mVpp					
Amplitude flatness (relative to 1kHz sine wave, 1Vpp, 50Ω)	≤5MHz: ±0.1dB;					
	≤15MHz: ±0.2dB;					
	≤25MHz: ±0.3dB;					
	≤40MHz: ±0.5dB;					
	40MHz: ±1.0dB					


Unit	Vpp, mVpp, Vrms, dBm(50Ω impedance)
Resolution	1mVpp
Offset property (50Ω terminal)	
Scope	±5Vpkac+dc
Precision	±(1% of the setting value + 5mV + 1% of the amplitude)
Waveform output	
Impedance	50 Ω
Modulation property	
Modulation type	AM, DSB-AM, FM, PM, ASK, FSK, PSK, BPSK, QPSK, 3FSK, 4FSK, OSK, PWM
AM	
Carrier	Sine wave, square wave, triangular wave, pulse wave, harmonic wave, arbitrary wave (except DC)
Modulation source	Internal, external and other channels
Modulation wave	Sine wave, square wave, triangle wave, noise, sampling wave, exp drop, half vector, Lorentz, dual audio, gaussian, ecg
Modulation frequency	2mHz~1MHz
Modulation depth	0% ~ 120%
DSB-AM	
Carrier	Sine wave, square wave, triangular wave, pulse wave, harmonic wave, arbitrary wave (except DC)
Modulation source	Internal, external and other channels
Modulation wave	Sine wave, square wave, triangle wave, noise, sampling wave, exp drop, half vector, lorentz, dual audio, gaussian, ecg
Modulation frequency	2mHz~1MHz
Modulation depth	0% ~ 120%
FM	
Carrier	Sine wave, square wave, triangular wave, pulse wave, harmonic wave, arbitrary wave (except DC)
Modulation source	Internal, external and other channels
Modulation wave	Sine wave, square wave, triangle wave, noise, sampling wave, exp drop, half vector, lorentz, dual audio, gaussian, ecg
Modulation frequency	2mHz~1MHz
PM	
Carrier	Sine wave, square wave, triangular wave, pulse wave, harmonic wave, arbitrary wave (except DC)
Modulation source	Internal, external and other channels
Modulation wave	Sine wave, square wave, triangle wave, noise, sampling wave, exp drop, half vector, lorentz, dual audio, gaussian, ecg
Modulation frequency	2mHz~1MHz
Phase deviation	0° ~ 360°
ASK	
Carrier	Sine wave, square wave, triangular wave, pulse wave, harmonic wave, arbitrary wave (except DC)
Modulation source	Internal and external
Modulation wave	50% duty cycle square wave
Modulation frequency	2mHz~1MHz
FSK	

Carrier	Sine wave, square wave, triangular wave, pulse wave, harmonic wave, arbitrary wave (except DC)
Modulation source	Internal and external
Modulation wave	50% duty cycle square wave
Modulation frequency	2mHz~1MHz
PSK	
Carrier	Sine wave, square wave, triangular wave, pulse wave, harmonic wave, arbitrary wave (except DC)
Modulation source	Internal and external
Modulation wave	50% duty cycle square wave
Modulation frequency	2mHz~1MHz
BPSK	
Carrier	Sine wave, square wave, triangular wave, pulse wave, harmonic wave, arbitrary wave (except DC)
Modulation source	internal
Data source	PN15, PN21, 01, 10
Modulation frequency	2mHz~1MHz
QPSK	
Carrier	Sine wave, square wave, triangular wave, pulse wave, harmonic wave, arbitrary wave (except DC)
Modulation source	internal
Data source	PN15, PN21
Modulation frequency	2mHz~1MHz
3FSK	
Carrier	Sine wave, square wave, triangular wave, pulse wave, harmonic wave, arbitrary wave (except DC)
Modulation source	internal
Modulation wave	50% duty cycle square wave
Modulation frequency	2mHz~1MHz
4FSK	
Carrier	Sine wave, square wave, triangular wave, pulse wave, harmonic wave, arbitrary wave (except DC)
Modulation source	internal
Modulation wave	50% duty cycle square wave
Modulation frequency	2mHz~1MHz
OSK	
Carrier	Sine wave
Modulation source	Internal, external
Shock time	8 ns - 4.99975 ms
Modulation frequency	2mHz~1MHz
PWM	
Carrier	Square wave

Carrier	Square wave					
Modulation source	Internal, external and other channels					
Modulation wave	Sine wave, square wave, triangle wave, noise, sampling wave, exp drop, half vector, Lorentz, dual audio, gaussian, ecp					
Modulation frequency	2mHz~50KHz					
Duty cycle deviation	0% ~ 50%					
External modulation input						
Input range	AM, DSB-AM, FM, PM, OSK, PWM: 75mVRMS ~ ± 5Vac + dc					
	ASK, FSK, PSK, TTL level					
Input bandwidth	50KHz					
Input impedance	10 KΩ					
Sweep frequency property						
Carrier	Sine wave, square wave, triangular wave, pulse wave, harmonic wave, arbitrary wave (except DC)					
Type	Linear					
Direction	Upward					
Frequency sweep time	1ms ~ 50Ks					
Hold/return time	0ms ~ 50Ks					
Trigger source	Internal, external, manual					
Tag	Synchronize the model's falling edge					
Burst property						
Carrier	Sine wave, square wave, triangular wave, pulse wave, harmonic wave, arbitrary wave (except DC)					
Carrier frequency	1 μHz ~ 100 MHz	1 μHz ~ 80 MHz	1 μHz ~ 60 MHz	1 μHz ~ 40 MHz	1 μHz ~ 25 MHz	1 μHz ~ 15 MHz
Burst counting	1 ~ 2000 000 000					
Start/stop phase	0° ~ 360°					
Internal cycle	2 μs ~ 500 s					
Door control source	External trigger					
Trigger source	Internal, external, manual					
Frequency meter						
Measurement functions	Frequency, period, positive/negative pulse width, duty cycle					
Frequency	1 μHz ~ 80 MHz					
Gate time	10ms~16s					
Input signal range	0 ~ 3.3 V					
Trigger property						
Trigger input						
Level	TTL - compatible					
Slope	Up or down (optional)					
Pulse width	>100ns					
Trigger output						
Level	TTL - compatible					
The pulse width	>60ns					

Maximum frequency	1MHz
Reference clock	
External reference input	
Lock range	10 MHz \pm 50 Hz
Level	Low level: 0~400mV, high level: 2.5V~5V
Locking time	< 2 s
Input impedance	50 Ω , DC coupling
Internal reference output	
Frequency	10 MHz \pm 50 Hz
Level	3.3 Vpp
Output impedance (typical value)	50 Ω , DC coupling
Synchronous output	
Level	TTL - compatible
Impedance	50 Ω nominal value
General features	
Interface	USB Host, USB Device
Display	4.3-inch color TFT LCD screen
Voltage	100-120VAC _{RMS} (\pm 10%),45Hz to 440Hz, CATII 120-240VAC _{RMS} (\pm 10%),45Hz to 66Hz, CATII
Power	<30W
Fuse	T, 0.5 A, 250 v, 5 x20mm
Environment	
Temperature range	Operation: 10°C ~ 40°C Non-operation: -20°C ~ 60°C
Humidity range	\leq +104°F(\leq +40°C): Relative humidity \leq 90% 106°F~122°F (+41°C ~50°C): Relative humidity \leq 60%
Altitude	Operation: below 3000 meters Non-operation: below 15000 meters
Mechanical specifications	
Dimensions (W x H x D)	308mm x 232mm x 110mm
Weight	3.09 KG



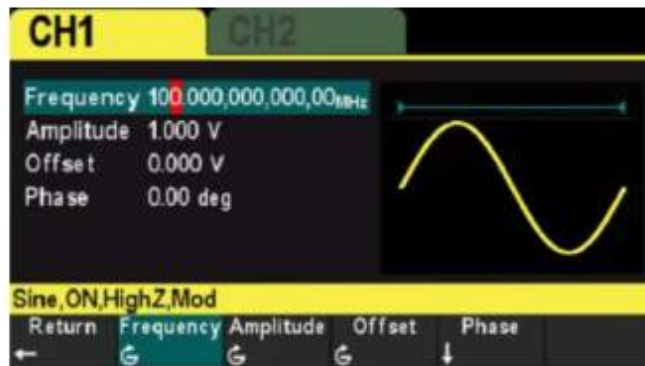


Equip with the sine wave with the maximum output bandwidth

Frequency range: 1 μ Hz~100MHz; Adjustable offset: \pm 5V;
 Adjustable phase: 0° ~ 360°.

Equip with the square wave with the maximum output bandwidth

Frequency range: 1 μ Hz~15MHz; Adjustable offset: \pm 5V;
 Adjustable phase: 0° ~ 360°.

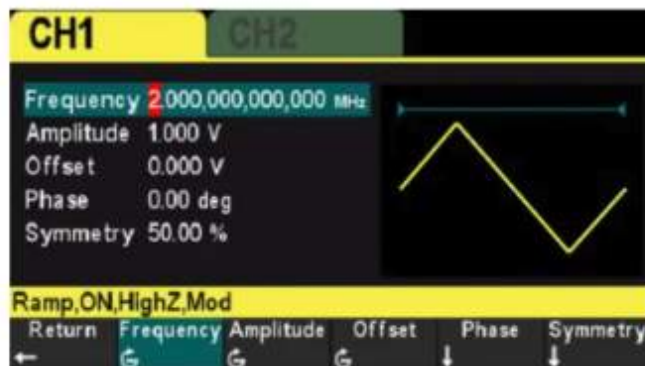


Equip with the triangle wave with the maximum output

Frequency range: 1 μ Hz~2MHz; Adjustable offset: \pm 5V; Adjustable phase: 0° ~ 360°; Adjustable symmetry: 0%~100%.

Equip with more than 160 kinds of arbitrary waveform output.

Index rise, index fall, ECG signal, Gauss, half vector, Lorentz, dual tone multi-frequency, DC voltage and other more than 160 kinds of arbitrary signals.

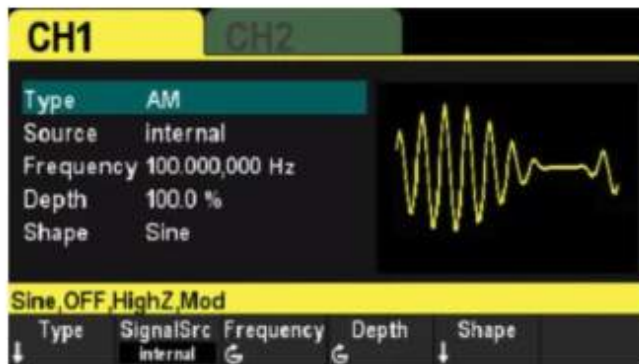


Equip with dual channel output modulation waveform AM/FM.

Rich modulation functions, support for AM, DSB - AM, FM, PM, ASK, FSK and PSK, BPSK, QPSK, 3 FSK, 4 FSK, OOK and PWM, etc.

Equip with dual channel output burst function.

Support control of burst output by internal, manual or external trigger sources. Three burst types are supported, including multi cycle, infinite cycle, and gated.

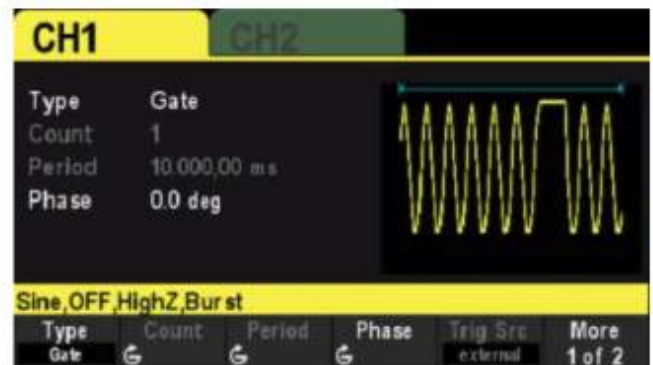

Equip with an 80MHz frequency meter.

The instrument can measure the frequency, period, duty cycle, positive pulse width and negative pulse width and other parameters of the external input signal.

Model	Channels	Max Output Frequency	Max Sampling Rate	Vertical Resolution	Waveform Length	Interface
HDG3012B	2CH	15MHz	300MSa/s	16Bits	2Mpts	USB Host , USB Device
HDG3022B	2CH	25MHz	300MSa/s	16Bits	2Mpts	USB Host , USB Device
HDG3042B	2CH	40MHz	300MSa/s	16Bits	2Mpts	USB Host , USB Device
HDG3062B	2CH	60MHz	300MSa/s	16Bits	2Mpts	USB Host , USB Device

Not:

Eğer seçemezsiniz "gemi İspanya, CZ veya rus depo"

Daha sonra biz sadece çin depodan göndermek anlamına gelir

Herhangi bir şüpheniz varsa, sadece bizimle irtibata tekrar,

Teşekkürler

Shipping Country	Destination Country	Estimated Delivery Time	Note
Russian Federation	Main City	About 3-10 working days	Ship from Moscow, no customs problem!
	Remote City	About 10-25 working days	
Czech Republic	Germany	About 1-3 working days	Ship from CZ warehouse, no need to deal with customs!
	Belgium	About 1-7 working days	
	Luxembourg		
	Slovakia		
	Czech Republic		
	Hungary		
	Austria		
	Netherlands		
	Denmark		
	France		
	Ireland		
	Italy		
	Slovenia		
	Spain		
	Finland		
	Latvia		
	Lithuania		
	Sweden		
	Bulgaria		
Estonia			
Greece			
Portugal			
Romania			
Spain	Spain	About 1-7 working days	Ship from Spain warehouse, no need to deal with customs!
	Portugal		
	France		
	Germany		
	Italy		
	Austria		
	Czech Republic		
	Denmark		
	Luxembourg		
	Netherlands		
	Belgium		
	Hungary		
	Poland Slovakia		
Slovenia			