



Micro SD Card Connector


KLS1-TF-003 Micro SD Card Connector

Material:

Insulator: HI—Temp Plastic UL 94V~0 Rated.
Contact: Copper Alloy (t=0.15mm).
Shell: Stainless Steel (t=0.15mm).

Electrical Characteristics:

Current Rating: 0.5 Amperes
Dielectric Withstanding Voltage: AC500V r.m.s.
Insulation Resistance: 1000 MΩ Minimum.
Contact Resistance: 40 mΩ Maximum.
Operating Temperature: -25°C~+90°C.
Life: 10,000 Cycles.
Card Push Insertion/Out Force: 0.7~1.20kgf.
Contact Separation Force: 0.20kgf Minimum

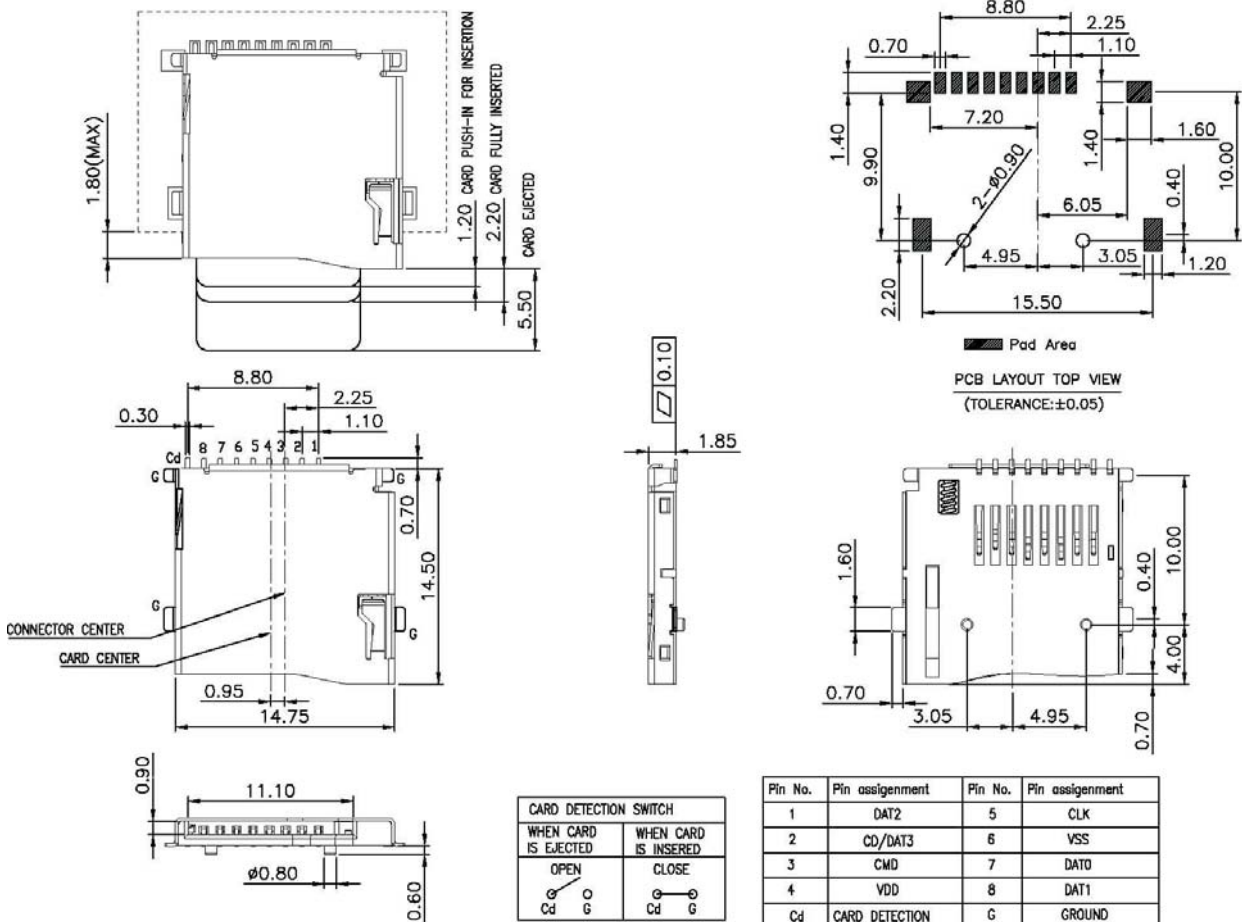

ORDER INFORMATION

Product NO.: KLS1-TF-003-R

