



健隆投資有限公司
STRONG BASE INVESTMENT LTD.

Unit 17, 11/F., Hewlett Centre, 52-54 Hoi Yuen Road, Kwun Tong, Kowloon, Hong Kong.
Tel: (852) 2793 3293 Fax: (852) 2793 3096



Approval Sheet
(確認書)

編號 Ref. No.	
日期 Issued Date	2015-10-26

公司名稱 : _____
Company Name

產品編號 : SB-5010IRB
Part No.

產品種類 : LED-LAMP
Category

產品描述 : 5MM/LAUNCH TUBE BLUE CLEAR LED
Description

客戶產品編號 : _____
Customer No.

備注 : _____
Remarks

STRONG BASE			
ISSUER	APPROVER	CHECKER	ENGINEER
	朱美丽	叶楠	高雪
Authorized Signature 客戶簽字			
部門 Department			
簽字 Signature			

工廠名稱:宇之亮電子(深圳)有限公司
工廠地址:廣東省深圳市龍崗區橫崗鎮荷坳村金源工業區
Company Name: Pretty Light (Shen Zhen) Limited
Factory Address:jin-Yuan,Industrial Zone He-Ao Cun,Heng-Gang
Zhen Long-Gang Area,Shen-Zhen City,

TEL: (755) 8976 7303 2862 5421 FAX: (755) 89767754 89767566



PART NO. : SB-5010IRB

DATE : 3 February 2016

5MM/LAUNCH TUBE BLUE CLEAR LED

SPECIFICATION

ABSOLUTE MAXIMUM RATING (Ta=25°C)

Item	Symbol	Rating	Unit
Forward Current	If	50	mA
Electrostatic Discharge (HBM)	---	---	V
Power Dissipation	Pd	100	mW
Peak Forward Current (1/10 Duty Cycle, 0.1 ms Pulse Width)	IFP	200	mA
Reverse Voltage	VR	5	V
Operating Temperature	Topr	-40~+80	°C
Storage Temperature	Tstg	-40~+80	°C

ELECTRICAL/OPTICAL CHARACTERISTICS RATING (Ta=25°C)

Item	Symbol	Test Conditions	Rating			Unit
			Min.	Typ.	Max.	
Forward Voltage	VF	IF=20mA	---	1.2	1.6	V
Reverse Current	Ir	VR=5V	---	---	20	µA
Radiant Power	Po	IF=20mA	---	1.8	---	mW
Dominant Wave Length	λd	IF=20mA	---	940	---	nm
Recommend Forward Current	IF(Rec)	-----	---	20	---	nA
Viewing Angle 2θ _{1/2}	2θ _{1/2}	IF=20mA	20°			deg.

Notes:-

1) θ_{1/2} is the off-axis angle where the luminous intensity is half the optical centerline value.

Soldering Conditions : Soldering Temp. ≤ 260°C

Soldering Time ≤ 5 Sec.

: ESD protection measures shall be considered and taken in the initial design stage, because static electricity and surge could damage the LED.

Caution A wrist band or an anti-electrostatic glove should be used when handling Electrostatic Sensitive Devices.





PART NO. : SB-5010IRB

DATE : 3 February 2016

5MM/LAUNCH TUBE BLUE CLEAR LED

PACKAGE DIMENSION

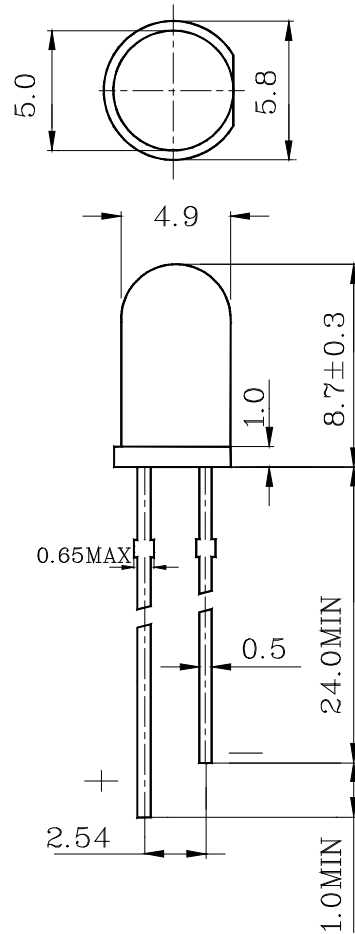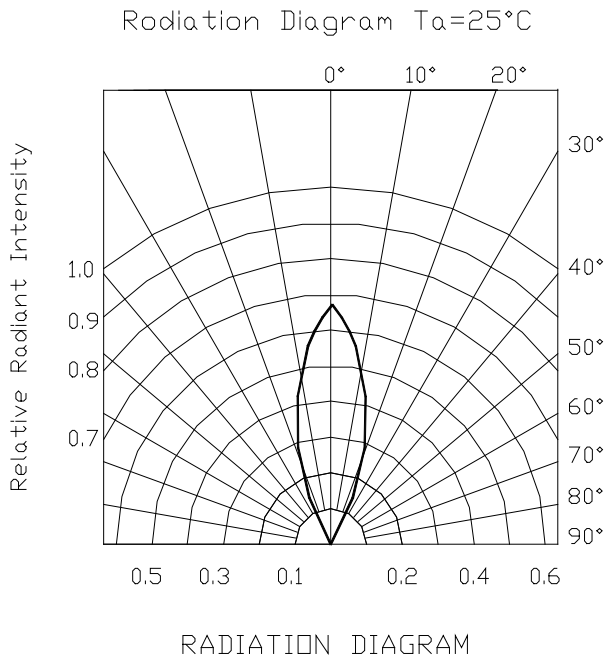

Item	Materials
Resin(Mold)	Epoxy Resin
Lead Frame	Copper Alloy

Tolerance: $\pm 0.25(0.01)$

Unit: mm(inch)

Part Number	Emitting Color	Lens Type
SB-5010IRB	/	BLUE CLEAR



PART NO. : SB-5010IRB

DATE : 3 February 2016

5MM/LAUNCH TUBE BLUE CLEAR LED

Typical Electrical/Optical Characteristics Curves

Fig1.Forward Current vs.Forward Voltage

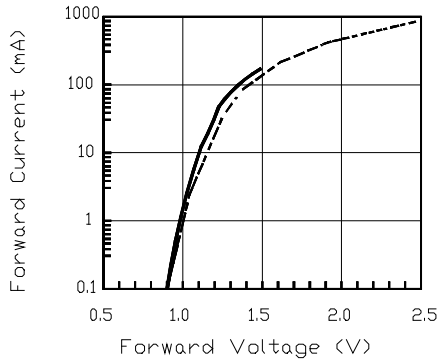


Fig2.Relative Radiant Intensity vs. Wavelength

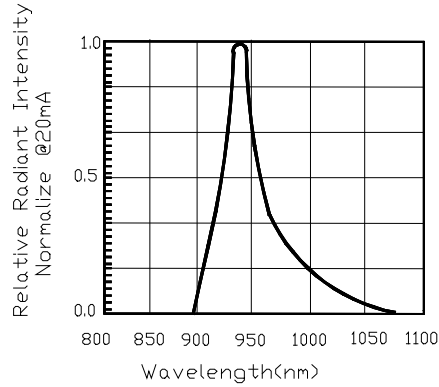


Fig3.Relative Radiant Power vs. Forward Peak Current

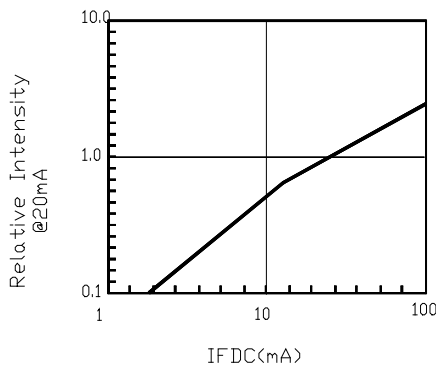


Fig4.Relative Radiant Power vs. Forward Peak Current

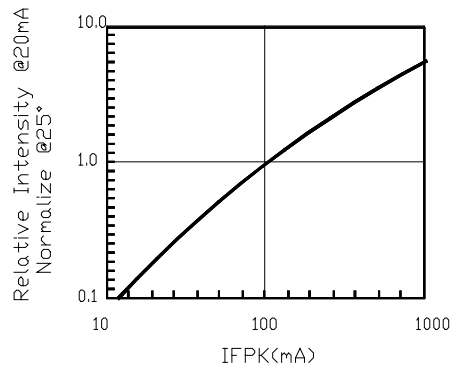


Fig5.Forward Voltage vs. Temperature

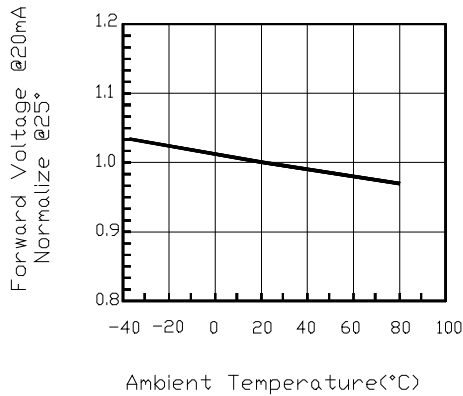


Fig6.Relative Radiant power vs. Temperature

