

## Description

Report Item

### Description:

Measuring Range: Simultaneous display of voltage and current

Voltage Measurement Range: DC 0-100V

Current Measurement Range: 0-10A

Power Measurement Range: 0-1000W

Voltage Error Range:  $\pm 1\%$ (Adjustable) Current Error Range:  $\pm 1\%$ (Adjustable)

Power Error Range:  $\pm 1\%$ (Adjustable)

Refresh Rate: 300ms/Times

Display Method HTN LCD: 3 Rows of 3 Digits

Customized or not: YES


Supply Voltage: DC 7-12V Working


Current: <15mA Working Temperature: -10-60°

### Package Included:

1 x DC 0-100V 10A 1000W LCD Digital Voltmeter Ammeter Wattmeter Voltage Current Power Meter Volt Detector Tester Monitor 48V 60V 72V



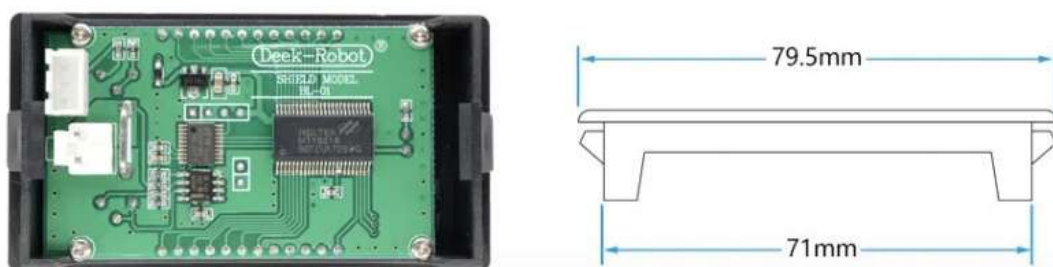

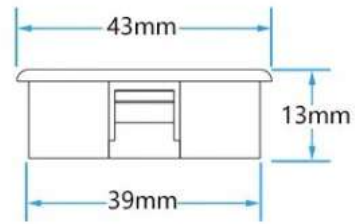

## Measuring Range

Simultaneous display of voltage and current

Voltage Measurement Range	Current Measurement Range	Power Measurement Range
DC 0-100V	0-10A	0-1000W
Voltage Error Range	Current Error Range	Power Error Range
±1% (Adjustable)	±1% (Adjustable)	±1% (Adjustable)
Refresh Rate	Display Method	Customized or not
300ms/Times	HTN LCD 3 Rows of 3 Digits	YES
Supply Voltage	Working Current	Working Temperature
DC 7-12V	<15mA	-10-60°C



