


### TECHNICAL INFORMATIONS

Item	Specifications	Conditions
Nominal Voltage	3.7V±0.05V	0.2C Discharge
Charging	Method	CC-CV
	Voltage	12.6V±0.05V
Typ. Capacity	1.300 mAh	0.2C Discharge cut-off Voltage 3.0V after standard charge at 23±2°C
Maximum Charge Voltage	4.2V	4.2V/Cell
Configuration	<b>1S1P</b>	
Standard Charging Current	1.300 mAh (1.0C)	Constant Current 1.0C
Standard Discharging Current	2.600 mAh (2.0C)	Constant current 2.0C
Max. Constant Discharge Current	<b>52 AH (40C)</b>	Ref.Temperature:10~50°C
Max. Burst Discharge Current	<b>65 AH (50C)</b>	≤3S
Discharge Cut-Off Voltage	<b>3.0V</b>	
Temperature	Charge	0 to +10°C
		10 to +45°C
	Discharge	-20 to +60°C
	Storage	Less than 1 year: -20~25°C
less than 3 months: -20~30°C		
less than 1 months: -20~45°C		
Weight	41.2 gr	approximately
Cycles Test	<p>Measure the capacity under the following cycle conditions until the cycle life ends when the three discharge capacity ≤80%,</p> <p>Cycle conditions: Standard Charge, rest for 30min;Discharge at 1.0C to 9V cut-off, Testing temperature is 23±2°C.</p> <p>Cycle Life≥300 cycles</p>	

### Cell Dimension

Item	Description	Dimension
T	Cell Tab Thickness	7.0± 0.5 mm
W	Cell Tab Width	34.0± 1 mm
L	Cell Tab Length	62.0± 1 mm
CL	Cable Length Length	-
P	Connector Model	-

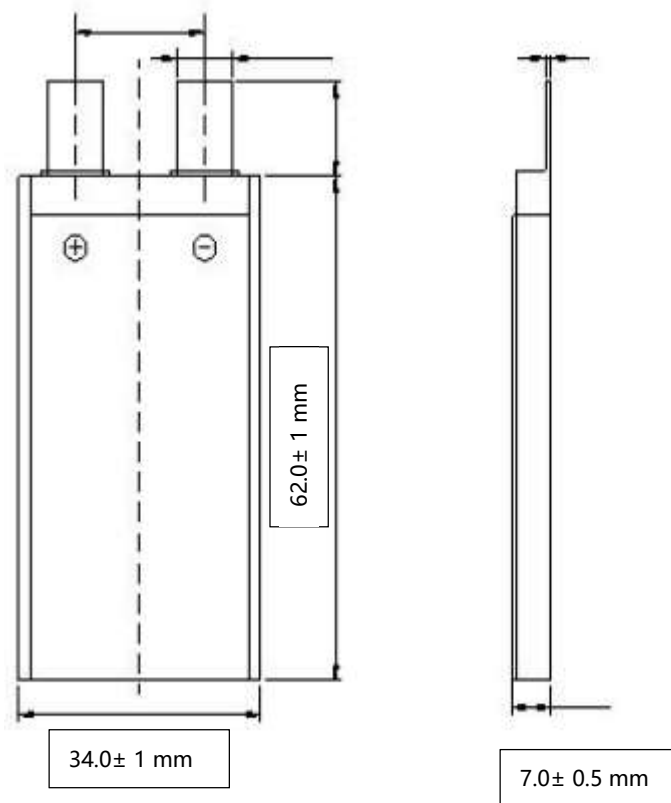

## Battery Pack Dimension

Item	Description	Dimension
T	Cell Tab Thickness	7.4± 1.0 mm
W	Cell Tab Width	35.5± 1.0 mm
L	Cell Tab Length	66.0± 1 mm
CL	Cable Length Length	50±3 mm (UL3239 22# AWG)
P	Connector Model	JST-SYP-2P

## Technical Drawing

